


The BAOF076 Series is ADSS/OPGW Optical Cable Suspension Clamp Assembly. The cable clip can reduce the static stress of the cable at the suspension point, improve the anti-vibration ability of the cable, and suppress the dynamic stress of wind vibration. Can also ensure that the cable bending does not exceed the allowable value, so that the cable does not produce bending stress, so the fiber optic cable will not produce additional loss.

Mechanical Dimension (mm)

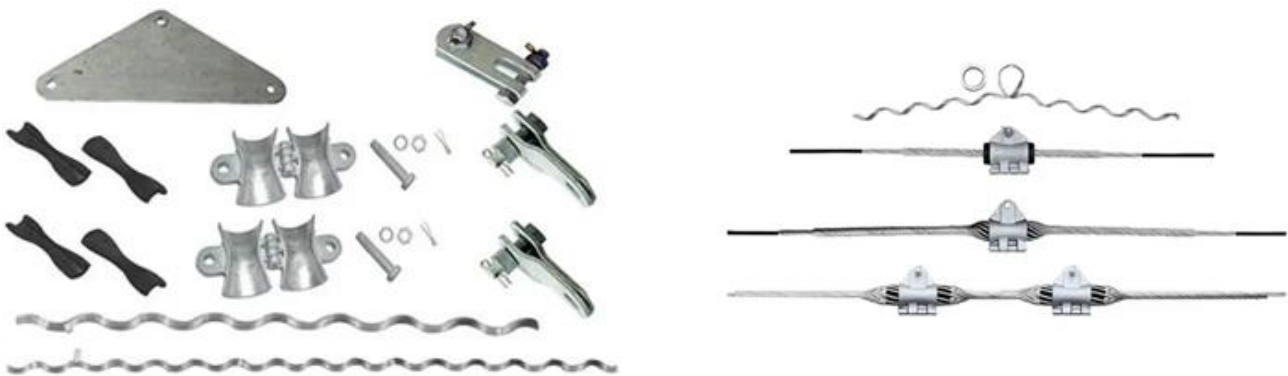

Structure And Materials:

Aluminum splint: Be made by pressure casting of corrosion-resistant aluminum alloy, which has stable chemical properties, good atmospheric corrosion resistance and good mechanical properties.

Rubber fixture: It is composed of high quality rubber and center reinforcement, with ozone resistance, chemical resistance, weather aging resistance, high and low temperature performance, high strength and elasticity, small compression deformation.

Bolt, plain pad, spring pad, nut, closed pin, u-shaped hanging ring: Power standard parts.

Protective wire pre-twisted wire: Aluminum alloy wire customized according to the predetermined mechanical properties and chemical composition, with high tensile strength, hardness and good elasticity and strong rust resistance, can be used for a long time in bad weather.

Outer pretwisted wire: The same as protective wire.