


The BCOL09 Series are UL listed to UL2808 (XOBA) mini-precision current transformers. The current transformer is small size and low cost.

Electrical Specification

Model	Input Current	Available Output
BCOL09-5	5A	Current Output @5mA, 10mA, 15mA 20mA Voltage Output @0.333V, 0.5V, 1V, 2V Output can be customize by customer
BCOL09-10	10A	
BCOL09-20	20A	
BCOL09-40	40A	
BCOL09-60	60A	



Mechanical Dimension (mm)

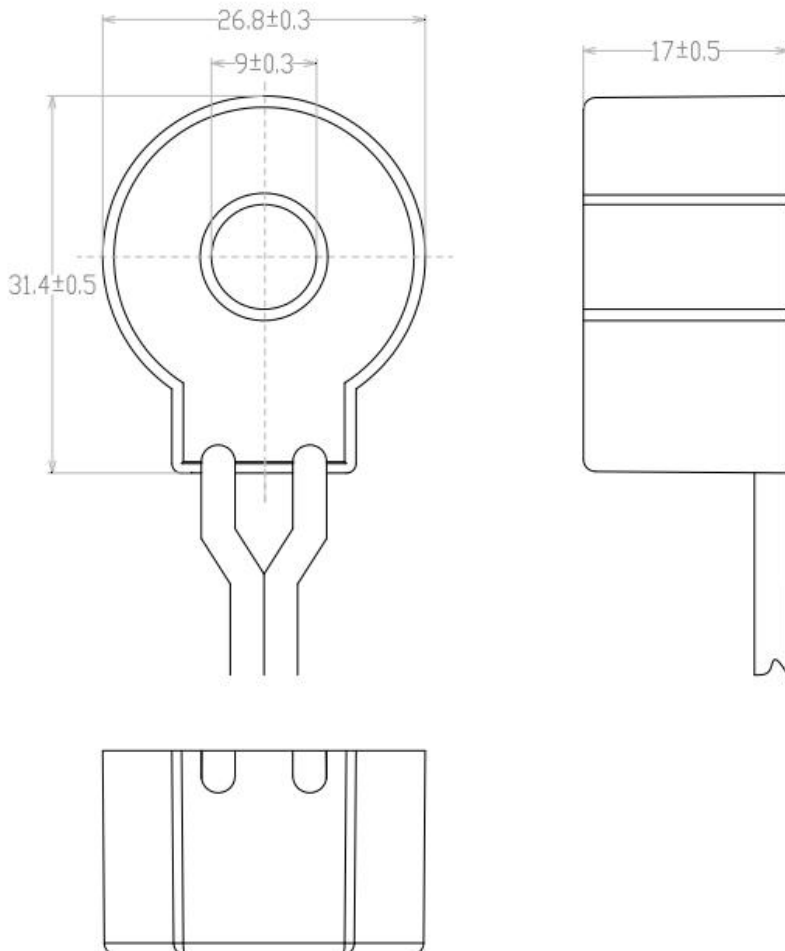

Application

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives

Feature

- 0.35" window opening
- Custom design Turns-Ratio available
- Rigid housing case with UL94V-0 durable plastic
- Approximate weight 25g

Specification

- Standard Input Current 0.01-60A
- Frequency 50Hz/60Hz
- Standard accuracy 0.1, 0.2, 0.5
- Insulation Voltage 4000Vac/1min
- Operating Temp. -40 ° C to +70 ° C
- Storage Temp. -45 ° C to +85 ° C
- IEC61010-1 and UL2808 Standards

Caution: Before installation, safety precautions must be followed by licensed. Never energize primary unless short circuited terminals or burden connected to secondary.