


The BPFC031 Series is a kind of damper, it is suitable for use on all conductor and earth wire constructions including ACSR, AAC, AAAC ,ACSR (Aluminium alloy conductor steel reinforced). A dreaded phenomenon in overhead transmission lines is the occurrence of high-frequency, short-wave vibrations in conductors, shield wires and aerial telecommunication cables due to natural wind flowl.

Mechanical Dimension (mm)

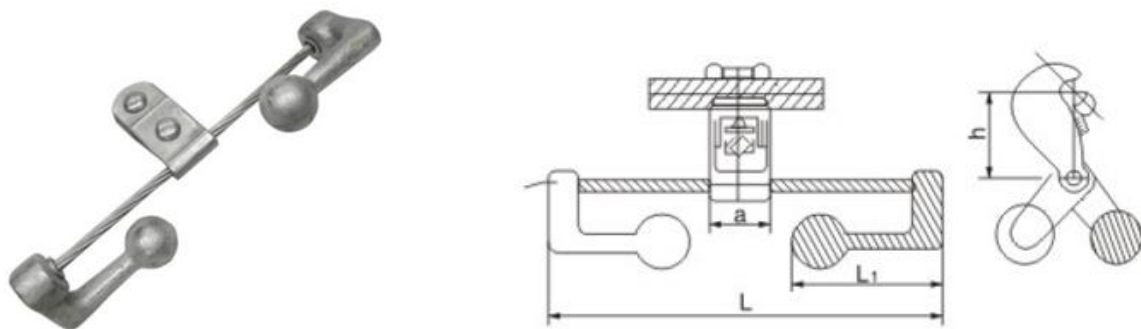

Model	Dimension(mm)				Applicable Conductor(mm)	Weight (kg)
	a	h	L1	L		
BPFC031-1	50	66	120	320	7.0-12.0	0.7
BPFC031-2	50	66	130	350	11.0-15.0	0.9
BPFC031-3	60	66	150	430	14.0-19.0	1.7
BPFC031-4	60	66	160	470	18.0-22.5	2.1
BPFC031-5	60	95	180	520	22.0-29.0	3
BPFC031-6	60	95	180	520	28.0-35.0	3.6
BPFC031-7	60	30.7	120	320	7.8	0.7
BPFC031-8	60	30.7	130	350	9.0-9.6	0.9
BPFC031-9	60	44.7	150	430	11.0-11.5	1.7
BPFC031-10	60	44.7	160	470	13	2.1