


The BPFC032 Series is a kind of hydraulic compression tension clamp, and it is used to fix and connect conductor onto the tension insulator string or the fittings on pole and tower through sustaining tensile force generated by the conductor. It is made of high-strength aluminum and steel materials, with clean surface and durable usage period, meanwhile it is easy for installation, free of hysteresis loss, low carbon and energy saving.

Mechanical Dimension (mm)

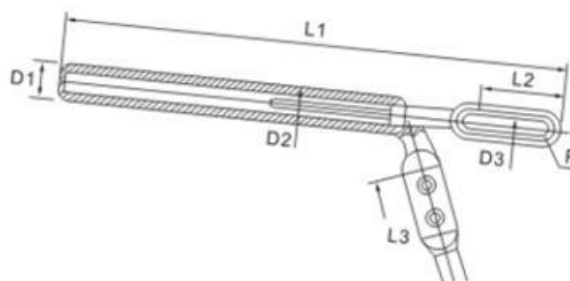

Model	Dimension(mm)							Conductor (mm ²)	Tension(kN)	Weight (kg)
	D1	D2	D3	L1	L2	L3	R			
BPFC032-1	36	16	18	490	65	240	10	LGJ-240/30	72	2.9
BPFC032-2	36	16	18	490	65	240	10	LGJ-240/40	79	3.1
BPFC032-3	36	20	18	520	65	250	11	LGJ-240/55	97	3.2
BPFC032-4	40	14	16	481	61	265	11	LGJ-300/15	65	3.6
BPFC032-5	40	14	18	497	67	265	11	LGJ-300/20	72	3.6
BPFC032-6	40	14	18	502	67	265	11	LGJ-300/25	79	3.5
BPFC032-7	40	16	18	522	67	265	11	LGJ-300/40	88	3.5
BPFC032-8	40	18	18	542	77	265	12	LGJ-300/50	98	3.9
BPFC032-9	42	22	20	577	82	265	12	LGJ-300/70	122	4.5
BPFC032-10	45	14	18	528	68	280	13	LGJ-400/20	84	4.3
BPFC032-11	45	14	18	538	68	280	13	LGJ-400/25	91	4.3
BPFC032-12	45	16	20	563	78	280	13	LGJ-400/35	99	4.6
BPFC032-13	45	20	20	573	78	280	13	LGJ-400/50	117	4.7
BPFC032-14	48	22	22	598	83	280	13	LGJ-400/65	123	5.4
BPFC032-15	48	26	26	650	95	280	13	LGJ-400/95	163	7.1